


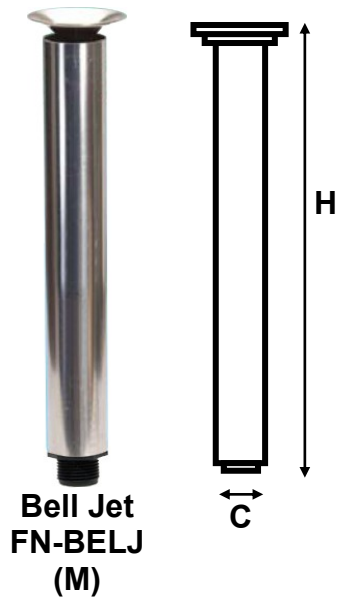
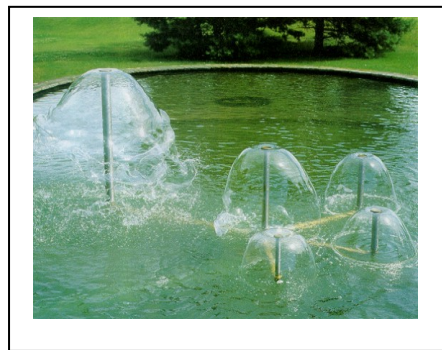


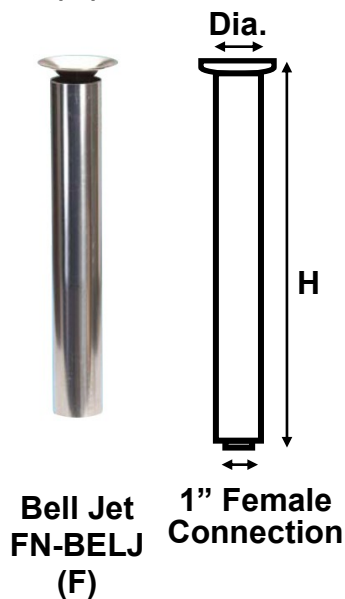

Bell Jet Nozzle

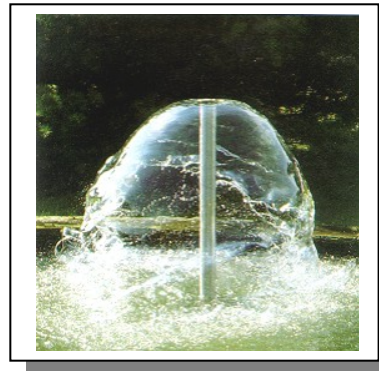

These Bell jet nozzle produces a most attractive, perfectly formed water bell, which is ideally suitable for pools in hotel foyers, reception areas, terraces, winter gardens, sheltered outdoor pools and it's have the lowest noise level of all fountain type. Bell displays are greatly enhanced by underwater illumination. All Bell nozzles are built in adjustment for varying the diameter of the bell.

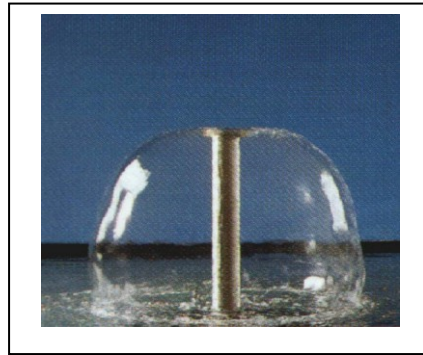

Bell Jet			
Pump Capacity	90w	250w	550w
	Approx. value		
Dia. Of Bell Max	1.10m	1.10m	1.10m
Water Depth. Min	0.15m	0.25m	0.26m
Material – Stainless Steel			

Connection (C) x Body (B) x Length (L)	
-	3/4" C x 1 1/2" B x 10" - 20" L (M)
-	1" C x 2" B x 10" - 20" L (M)
-	1/2" C x 1 1/2" B x 10 - 20" L (M)
-	1" C x 1 3/4" B x 10" - 20" (F)

(M) = Male Connection (F) = Female Connection

*Note: Default Body Length: 18", other sizes available are all custom made orders.

Hydro Data	Bell Jet Jet					
	1/2"		3/4"		1"	
	NWD	NPD	NWD	NPD	NWD	NPD
FD	L/min	Bar	L/min	Bar	L/min	Bar
200mm	17.0	0.090				
300mm	21.0	0.11	35.0	0.11		
400mm	25.0	0.14	43.0	0.13	43.0	0.14
500mm	29.0	0.17	51.0	0.16	51.0	0.17
600mm	33.0	0.21	59.0	0.20	59.0	0.21
700mm			67.0	0.25	67.0	0.26
900mm					75.0	0.32
MA	Stainless Steel					
GW	0.6kg		1.3kg		1.4kg	

FD = Fountain Diameter
 NPD = Nozzle Pressure Demand MA = Material
 NWD = Nozzle Water Demand W = Width
 C. = Connection H = Height
 GW = Weight